


Pinout ESP8266 NodeMCU by Doc Cool (cool-web.de)

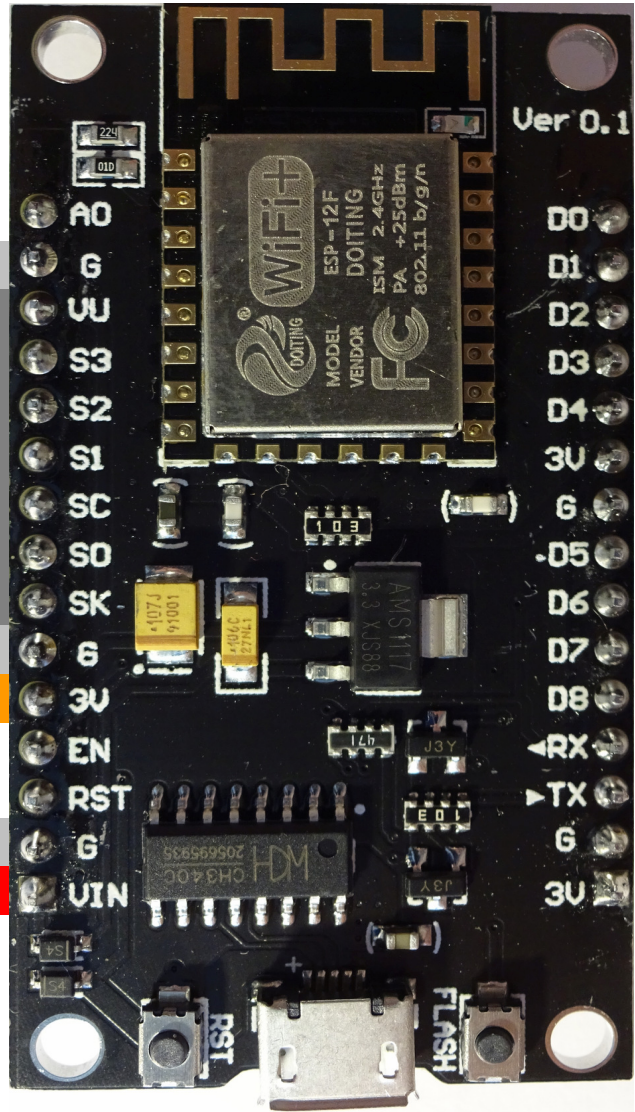

Analog Input

Diese Pins führen zum Flash Speicher und können nicht verwendet werden!

3.3V

Chip Enable

Reset

V Input 5...9V

Reset

A0	AO	D0	D0
GND	G	D1	D1
VU	UU	D2	D2
S3	S3	D3	D3
S2	S2	D4	D4
S1	S1	3U	3V
SC	SC	GND	GND
SD	SO	-D5	D5
SK	SK	D6	D6
GND	G	D7	D7
3V	3U	D8	D8
EN	EN	RX	RX
RST	RST	TX	TX
GND	G	GND	GND
VIN	VIN	3U	3V
RST	RST	FLASH	FLASH

GPIO SPI
I2C

D0 16 intern LED

D1 5 SCL

D2 4 SDA

D3 0 Firmw. Upload intern LED

D4 2 3.3V

D5 14 SCK

D6 12 MISO

D7 13 MOSI

D8 15 SS

RX 1

TX 3

GND

3.3V

FLASH Enable Flash